

# BETAplus

Portable Cutting Machine with Tilting Head Ø 300 mm



## Features

Used for cutting processes of aluminum, plastic and wooden materials.




- Safe cutting with double spring system and saw barrier
- Ability to cut on the upper table
- Cutting at any desired angle between -45° and +45°
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 (Zero) position)
- 0°, 15°, 22.5°, 30°, 45° right and left angle fixing

## Standard Equipment

- Profile gauge

## Optional Equipment

- Ø 300 mm saw blade
- Second clamp
- Conveyor
- Stand
- Brake System
- Three-phase system

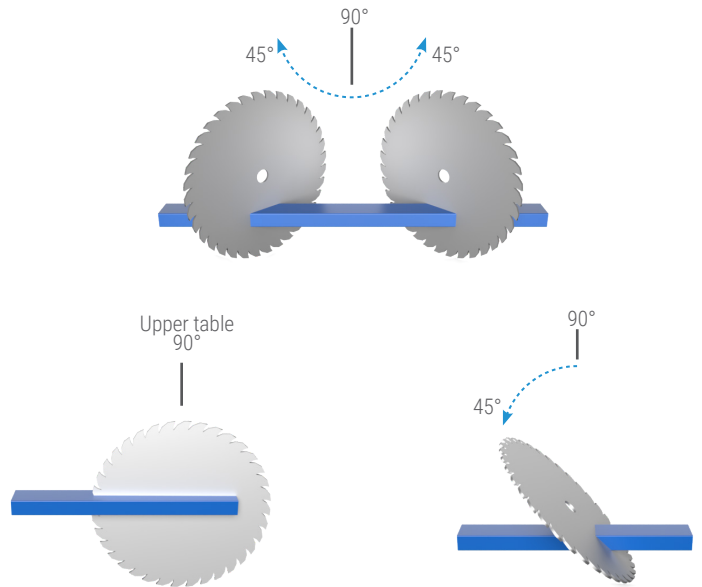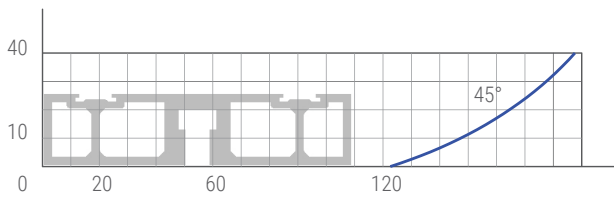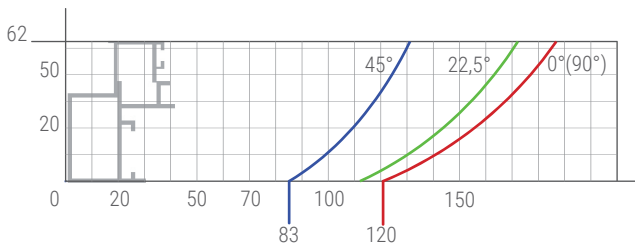

HP kW	n r.p.m	1~ Hz	I (230 V) A	Ø D mm	Ø d mm	s mm	n r.p.m	45° a x b mm	c mm	h mm	l x w x h (mm) kg
1 1,1	3000 r.p.m	50 60	5 A	300 mm	30-32 mm	3,2 mm	3000 r.p.m	120 x 35 mm	165 mm	40 mm	500 x 540 x 690 26,2 kg