



Used for cutting processes of aluminum, plastic and wooden materials.


- · Safe cutting with double spring system and saw barrier
- Ability to cut on the upper table
- Cutting at any desired angle between -45° and +45°
- Head with ability to tilt left between 0° and 45° (Performs tilt cutting when lower plate is at 0 (Zero) position)
 • 0°, 15°, 22.5°, 30°, 45° right and left angle fixing


Standard Equipment

• Profile gauge

Optional Equipment

- Ø 300 mm saw blade
- · Second clamp
- Conveyor
- Stand
- Brake System
- Three-phase system

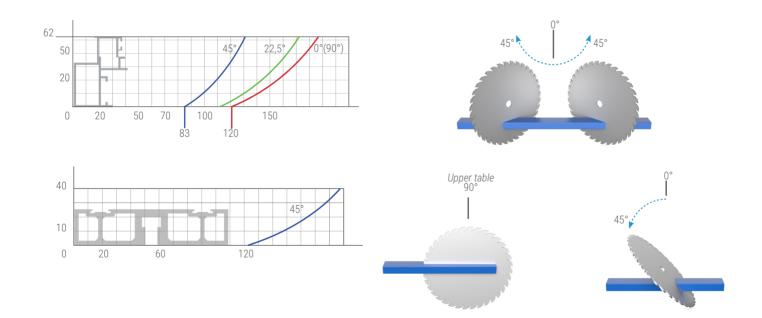

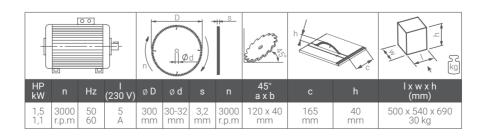

Özçelik Makina continuously improves its products and offers new and modern solutions for PVC and Aluminum Profile Processing. Accordingly, Özçelik reserves the right to change the information in this document without notice. All dimensions and weights are reference values. Valid from January 2023