



## FEATURES

Used for cutting window strips of plastic profiles at an angle of 45°



- Pneumatic cutting
- Automatic returning to process starting point
- Conveyor system with measuring equipment
- Cutting and conveying speed adjustment

## STANDARD EQUIPMENTS

- Ø100 mm saw blade (2 pcs)
- Ø200 mm saw blade (2 pcs)
- Strip mold
- Conveyor

## OPTIONAL EQUIPMENTS

- Special mold
- Single-phase system

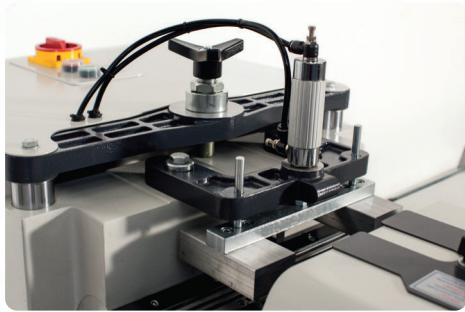

HP kW	n r.p.m	3~ Hz	I (400 V) A	Ø D1 mm	Ø D2 mm	Ø d mm	S1 mm	S2 mm	n r.p.m	CA	x max. mm	y max. mm	Air Pressure bar	Air Consumption L / min	l x w x h (mm) kg
1,5 1,1	3000	50 60	4,6	200 mm	100 mm	32-22 mm	2 mm	4 mm	3000	45°	50 mm	30 mm	6 - 8 bar	20 L / min	1020 x 2515 x 1110 116 kg

CA: Cutting Angles