

SPICA

V Cut & 90° Notching Machine









FEATURES



Used for Vcutting, arrow cutting, 45° cutting and 90° notching processes of aluminum and plastic profiles.

- Hydro-Pneumatic cutting process
- Adjustable saw blade travel speed to the profiles
- Double hand start

STANDARD EQUIPMENTS


- Ø 500 mm saw (2 pcs.)
- Cooling system
- Vcutting set with Pneumatic clamps
- Right and left conveyor (Vcutting and L cutting 3 m)
- L cutting (90°) notching set with Pneumatic clamps

							
HP kW	n	Hz	I (400 V)	Air Pressure	Air Consumption	l x w x h (mm)	kg
4 3	2900 r.p.m	50	6,6 A	6 - 8 bar	55 L / min	1165 x 1125 x 1980	460 kg

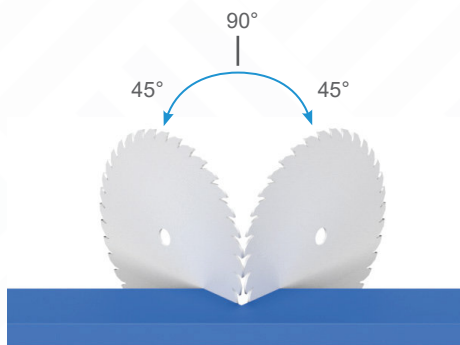


A:140 mm B:230 mm H:250 mm

V CUTTING




B:230 mm H:250 mm

90° ARROW CUTTING



B:230 mm C:180 mm H:250 mm

90° NOTCHING



A:140 mm H:250 mm

45° CUTTING